

## FUJI POWER MOSFET Super FAP-G Series

### N-CHANNEL SILICON POWER MOSFET

#### Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

#### Applications

- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

#### Maximum ratings and characteristic Absolute maximum ratings

(T<sub>c</sub>=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V <sub>DS</sub>	250	V
	V <sub>DSX</sub> *5	220	V
Continuous drain current	I <sub>D</sub>	±10	A
Pulsed drain current	I <sub>D(puls)</sub>	±40	A
Gate-source voltage	V <sub>GS</sub>	±30	V
Non-repetitive Avalanche current	I <sub>AS</sub> *2	10	A
Maximum Avalanche Energy	E <sub>AS</sub> *1	182	mJ
Maximum Drain-Source dV/dt	dV <sub>DS</sub> /dt *4	20	kV/μs
Peak Diode Recovery dV/dt	dV/dt *3	5	kV/μs
Max. power dissipation	P <sub>D</sub>	T <sub>a</sub> =25°C	2.16
		T <sub>c</sub> =25°C	25
Operating and storage temperature range	T <sub>ch</sub>	+150	°C
	T <sub>stg</sub>	-55 to +150	°C
Isolation voltage	V <sub>ISO</sub>	2	kVrms

\*1 L=3.05mH, V<sub>CC</sub>=48V \*2 T<sub>ch</sub>≤150°C \*3 I<sub>F</sub>≤-I<sub>D</sub>, -di/dt=50A/μs, V<sub>CC</sub>≤BV<sub>DSS</sub>, T<sub>ch</sub>≤150°C

\*4 V<sub>DS</sub> ≤ 250V \*5 V<sub>GS</sub>=-30V \*6 t=60sec f=60Hz


#### Electrical characteristics (T<sub>c</sub> =25°C unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V <sub>(BR)DSS</sub>	I <sub>D</sub> =250μA V <sub>GS</sub> =0V	250			V
Gate threshold voltage	V <sub>GS(th)</sub>	I <sub>D</sub> =250μA V <sub>DS</sub> =V <sub>GS</sub>	3.0		5.0	V
Zero gate voltage drain current	I <sub>DSS</sub>	V <sub>DS</sub> =250V V <sub>GS</sub> =0V			25	μA
		V <sub>DS</sub> =200V V <sub>GS</sub> =0V			250	μA
Gate-source leakage current	I <sub>GSS</sub>	V <sub>GS</sub> =±30V V <sub>DS</sub> =0V		10	100	nA
Drain-source on-state resistance	R <sub>DS(on)</sub>	I <sub>D</sub> =5A V <sub>GS</sub> =10V		200	260	mΩ
Forward transconductance	g <sub>fs</sub>	I <sub>D</sub> =5A V <sub>DS</sub> =25V	5	10		S
Input capacitance	C <sub>iss</sub>	V <sub>DS</sub> =75V		785	1178	pF
Output capacitance	C <sub>oss</sub>	V <sub>GS</sub> =0V		88	132	pF
Reverse transfer capacitance	C <sub>rss</sub>	f=1MHz		4	6	pF
Turn-on time t <sub>on</sub>	td(on)	V <sub>CC</sub> =48V I <sub>D</sub> =5A		12	18	ns
	t <sub>r</sub>	V <sub>GS</sub> =10V		2.7	4.1	
Turn-off time t <sub>off</sub>	td(off)	R <sub>GS</sub> =10 Ω		22	33	ns
	t <sub>f</sub>			7.4	11.1	
Total Gate Charge	Q <sub>G</sub>	V <sub>CC</sub> =125V		21	31.5	nC
Gate-Source Charge	Q <sub>GS</sub>	I <sub>D</sub> =10A		8	12	
Gate-Drain Charge	Q <sub>GD</sub>	V <sub>GS</sub> =10V		5	7.5	
Avalanche capability	I <sub>AV</sub>	L=100μH T <sub>ch</sub> =25°C	10			A
Diode forward on-voltage	V <sub>SD</sub>	I <sub>F</sub> =10A V <sub>GS</sub> =0V T <sub>ch</sub> =25°C		1.10	1.65	V
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =10A V <sub>GS</sub> =0V		0.155		μs
Reverse recovery charge	Q <sub>rr</sub>	-di/dt=100A/μs T <sub>ch</sub> =25°C		1.05		μC


#### Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R <sub>th(ch-c)</sub>	channel to case			5.0	°C/W
	R <sub>th(ch-a)</sub>	channel to ambient			58.0	°C/W







#### Outline Drawings (mm)






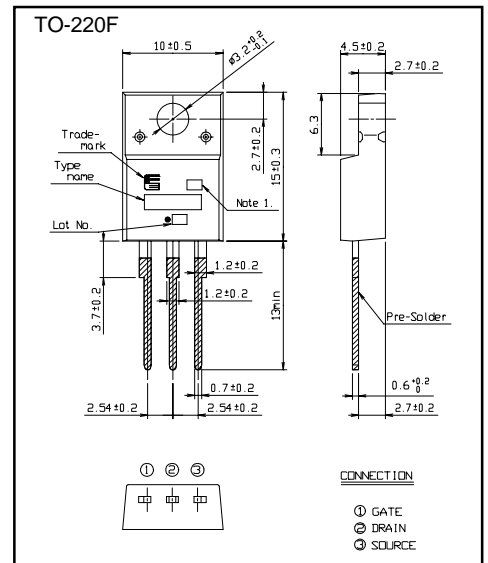




#### Equivalent circuit schematic

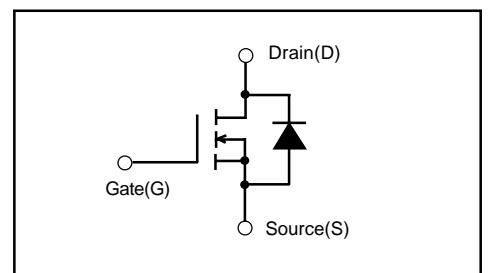

## Characteristics

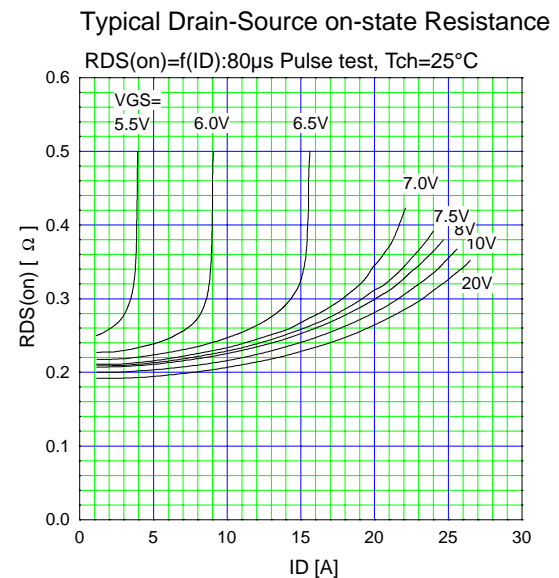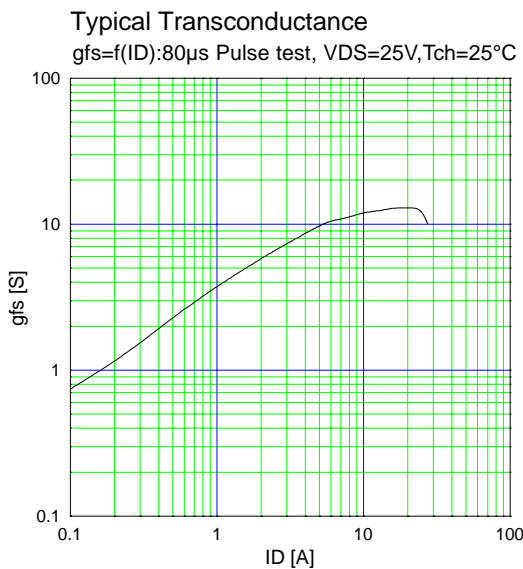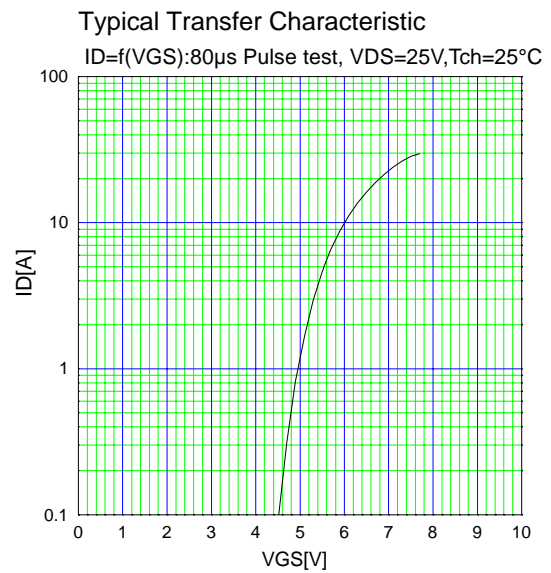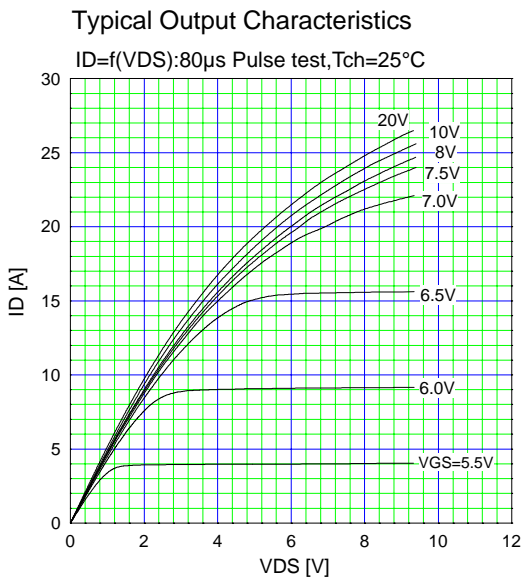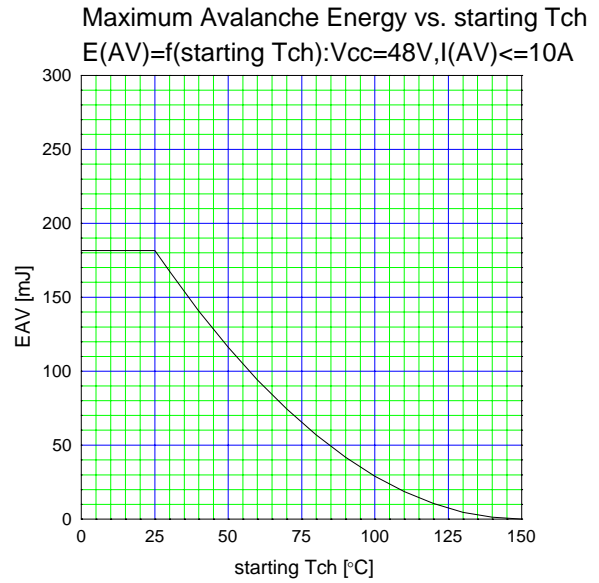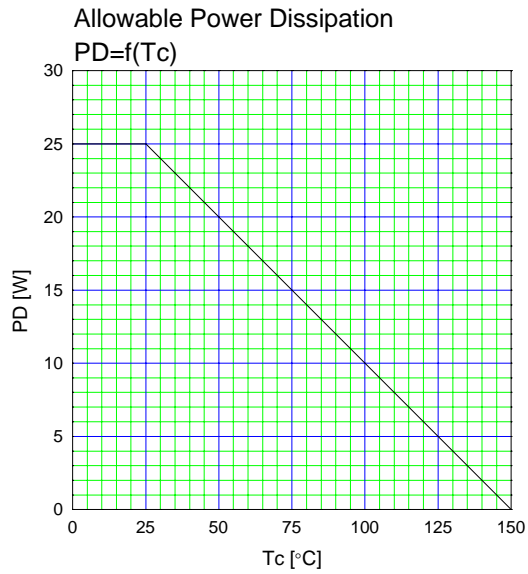

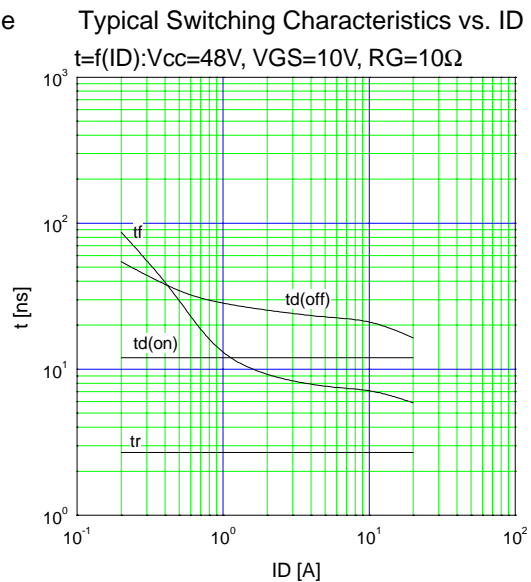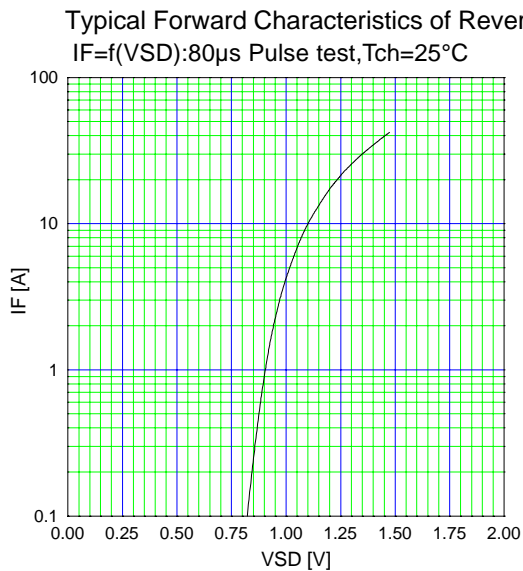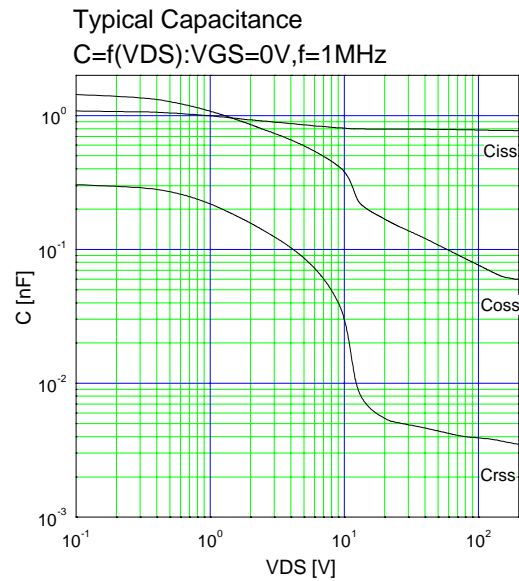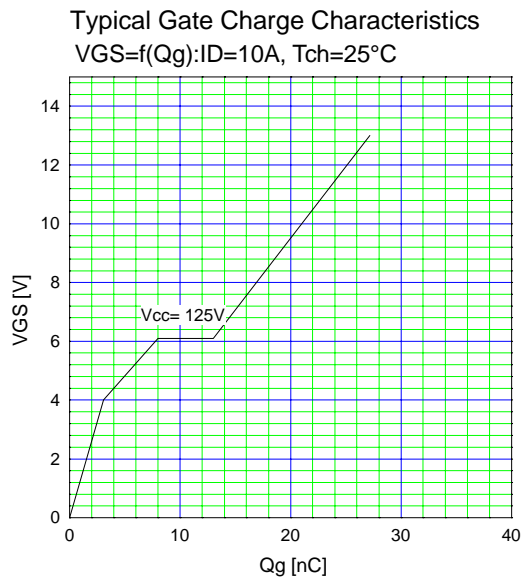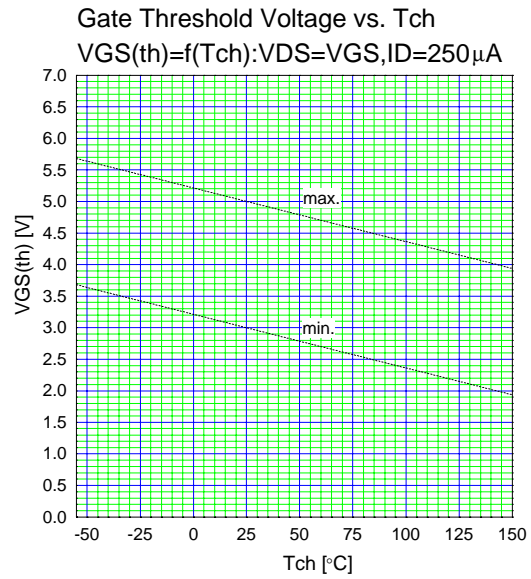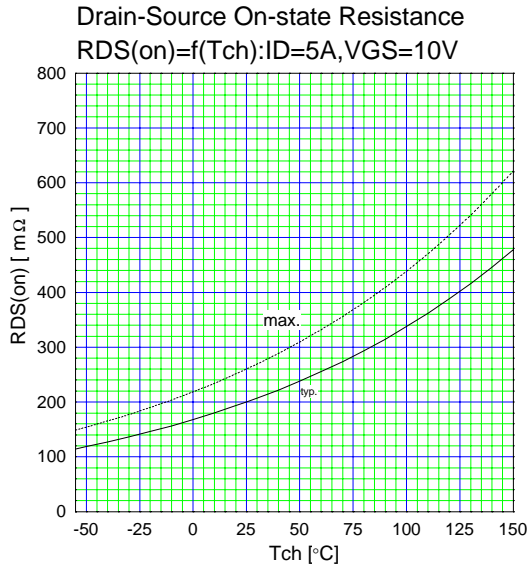

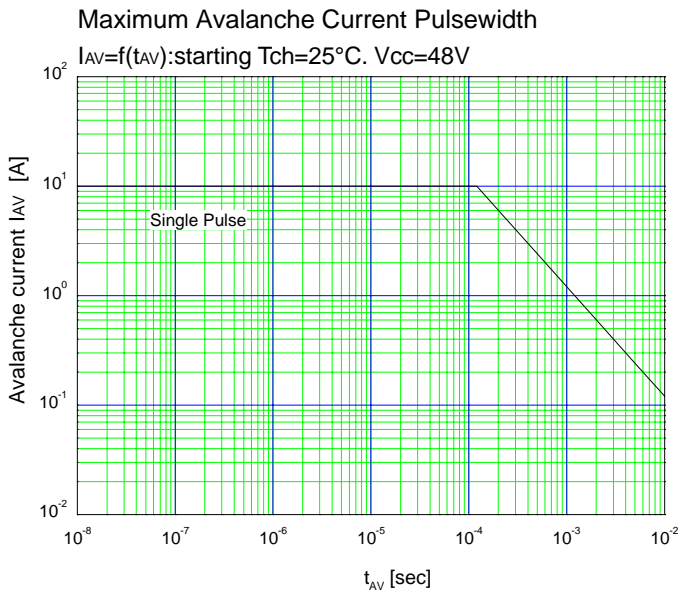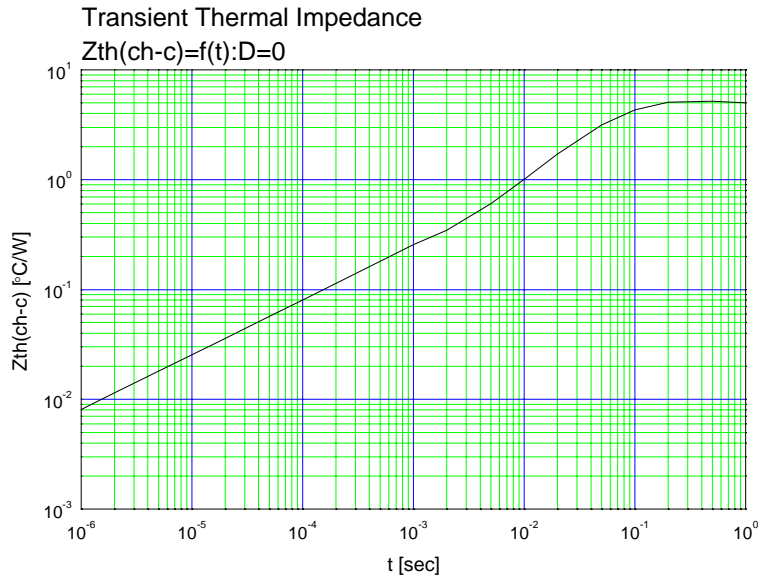

**This datasheet has been downloaded from:**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**Free Download**

**Daily Updated Database**

**100% Free Datasheet Search Site**

**100% Free IC Replacement Search Site**

**Convenient Electronic Dictionary**

**Fast Search System**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**